



Solid, simple and smart:
advanced reliability in compressed air

STORMY PRO 1.5-7.5 kW/2-10 hp



MARK

STORMY PRO: your work floor companion

The Mark STORMY PRO combines performance with comfort like no other piston compressor. Ultra-quiet and easy to use, the STORMY PRO gives you reliable and powerful pneumatic support right on your work floor. With a power range from 2 to 10 hp, and flexible options for air storage and treatment, a STORMY PRO model is always available to fit your needs.



Extra quiet

Optimized canopy design minimizes sound levels.



Easy to use

Intuitive control panel with pressure gauge and hour counter.




Compact

All-in-one design reduces the unit's footprint.



The integrated quality air solution

If you need dry, high-quality air, the Mark STORMY PRO series is available with an integrated refrigerant dryer for a compact all-in-one solution.

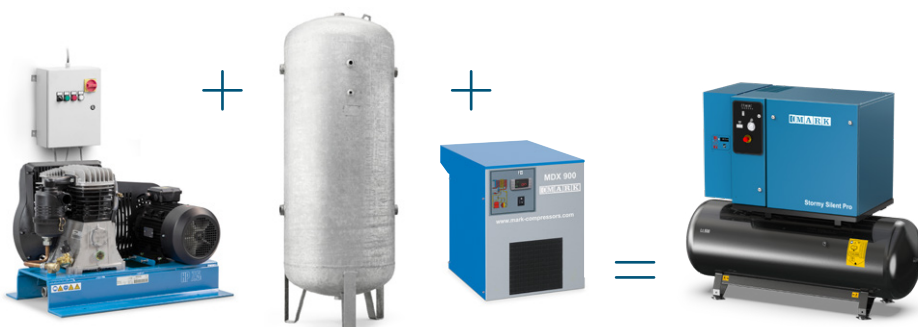

A flexible go-getter

Strong performance

The STORMY PRO packs a punch in a small frame. Its new pump was designed to give you a strong, energy-efficient performance and superior reliability. A dedicated cooling fan ensures smooth operation, even in hot and dusty conditions.



Flexible storage

To ensure stable air delivery, the STORMY PRO offers a range of air storage options. For those with limited space, the floor-mounted unit comes with an integrated 27-liter air vessel. If you need more storage, tank-mounted models are available with 270-liter or 500-liter vessels.

Always dependable

When you have things to do, you can't afford your compressor to break down. The STORMY PRO's high-efficiency piston pump with low rotation speed delivers exceptional reliability and a long lifetime.



The right STORMY PRO to meet your needs

STORMY PRO S27 F2MZ - STORMY PRO S27 F3Z

2-3 hp / 1.5-2.2 kW

- Extra quiet for comfortable work floor operation.
- Easy to operate and maintain.
- Integrated 27-liter air vessel ensures a stable air supply.
- Built for safety with fire-proof insulating foam and metal belt guard.
- Ideal for small pneumatic jobs.

STORMY PRO S100 F3MZ / STORMY PRO S500F5Z

3-5 hp / 2.2-4 kW

- New NS31 pump delivers increased performance and reliability.
- Canopy was designed specifically to minimize sound.
- Available in floor-mounted and tank-mounted (270 and 500-liter) models.
- All-in-one design reduces the unit's footprint.
- Ideal for automotive service stations.

STORMY PRO SF6Z / STORMY PRO S500F10XZD

5.5-10 hp / 4-7.5 kW

- Flexible air storage options with floor-mounted and tank-mounted (270 and 500-liter) models.
- Heavy-duty cooling system with dedicated fan for dependable operation in all conditions.
- Can be outfitted with integrated dryer for an all-in-one quality air solution.
- Ideal for workshops and carpentry shops.



Extra quiet



Compact



Easy to use



Integrated vessel



Improved reliability

STORMY PRO S27 F2MZ - STORMY PRO S27 F3Z 2-3 hp

Description	Power	Pressure	Pump	Pump RPM	Displacement	Vessel	Noise	Voltage	Dimensions	Weight	Outlet
	HP	bar	Type	Min ⁻¹	l/min	L.	Lp(4m)	V / ph / Hz	L x W x H	KG	Connection
STORMY PRO S27 F2MZ 230/50	2	10	NS12S	1075	255	27	61	230/1/50	735x430x845	86	1/4" G
STORMY PRO S27 F2Z 400/50	2	10	NS12S	1075	255	27	61	400/3/50	735x430x845	86	1/4" G
STORMY PRO S27 F3MZ 230/50	3	10	NS12S	1350	320	27	62	230/1/50	735x430x845	87	1/4" G
STORMY PRO S27 F3Z 400/50	3	10	NS12S	1350	320	27	62	400/3/50	735x430x845	87	1/4" G



High performance



Extra quiet



Flexible storage



Compact



Improved reliability

STORMY PRO S100 F3MZ / STORMY PRO S500F5Z 3-5 hp

Description	Power	Pressure	Pump	Pump RPM	Displacement	Vessel	Noise	Voltage	Dimensions	Weight	Outlet
	HP	bar	Type	Min ⁻¹	l/min	L.	Lp(4m)	V / ph / Hz	L x W x H	KG	Connection
STORMY PRO S100 F3MZ 230/50	3	10	NS19S	1050	393	100	65	230/1/50	1002x1227x580	220	1/2" G
STORMY PRO S100 F3Z 400/50	3	10	NS19S	1050	393	100	65	400/3/50	1002x1227x580	220	1/2" G
STORMY PRO S270s F3MZ 230/50	3	11	NS19S	1050	393	270	65	230/1/50	1522x580x1242	248	1/2" G
STORMY PRO S270s F3Z 400/50	3	11	NS19S	1050	393	270	65	400/3/50	1522x580x1242	248	1/2" G
STORMY PRO S270 F3MZ 230/50	3	11	NS31	1050	444	270	65	230/1/50	1522x580x1242	248	1/2" G
STORMY PRO S270 F3Z 400/50	3	11	NS31	1050	444	270	65	400/3/50	1522x580x1242	248	1/2" G
STORMY PRO SF4Z 400/50	4	11	NS31	1300	553	0	69	400/3/50	750x580x710	170	3/4" G
STORMY PRO S270 F4Z 400/50	4	11	NS31	1300	553	270	69	400/3/50	1522x580x1242	248	1/2" G
STORMY PRO SF5Z 400/50	5	11	NS31	1400	598	0	69	400/3/50	750x580x710	170	3/4" G
STORMY PRO S270F5Z 400/50	5	11	NS31	1400	598	270	69	400/3/50	1522x580x1242	248	1/2" G
STORMY PRO S500F5Z 400/50	5	11	NS31	1400	598	500	69	400/3/50	1937x600x1348	274	3/4" G



**High
performance**



Extra quiet



**Flexible
storage**



Compact



Quality air

STORMY PRO SF6Z / STORMY PRO S500F10XZD 5.5-10 hp

Description	Power	Pressure	Pump	Pump RPM	Displacement	Vessel	Noise	Voltage	Dimensions	Weight	Outlet
	HP	bar	Type	Min ⁻¹	l/min	L.	Lp(4m)	V / ph / Hz	L x W x H	KG	Connection
STORMY PRO SF6Z 400/50	5	11	NS39	1010	660	0	65	400/3/50	1000x741x955	153	3/4" G
STORMY PRO SF6XZ 400/50	5	11	NS39	1010	660	0	65	400/3/50	1000x741x955	157	3/4" G
STORMY PRO S270F6Z 400/50	5	11	NS39	1010	660	270	65	400/3/50	1517x741x1487	220	1/2" G
STORMY PRO S270F6XZ 400/50	5	11	NS39	1010	660	270	65	400/3/50	1517x741x1487	224	1/2" G
STORMY PRO S500F6Z 400/50	5	11	NS39	1010	660	500	65	400/3/50	1943x741x1593	253	3/4" G
STORMY PRO S500F6XZ 400/50	5	11	NS39	1010	660	500	65	400/3/50	1943x741x1593	257	3/4" G
STORMY PRO S500F6ZD 400/50	5	11	NS39	1010	660	500	65	400/3/50	1943x767x1596	265	3/4" G
STORMY PRO S500F6XZD 400/50	5	11	NS39	1010	660	500	65	400/3/50	1943x767x1596	269	3/4" G
STORMY PRO SF8Z 400/50	7	11	NS39	1140	750	0	68	400/3/50	1000x741x955	229	3/4" G
STORMY PRO SF8XZ 400/50	7	11	NS39	1140	750	0	68	400/3/50	1000x741x955	235	3/4" G
STORMY PRO S500F8Z 400/50	7	11	NS39	1140	750	500	68	400/3/50	1943x741x1593	355	3/4" G
STORMY PRO S500F8XZ 400/50	7	11	NS39	1140	750	500	68	400/3/50	1943x741x1593	361	3/4" G
STORMY PRO S500F8ZD 400/50	7	11	NS39	1140	750	500	68	400/3/50	1943x767x1596	367	3/4" G
STORMY PRO S500F8XZD 400/50	7	11	NS39	1140	750	500	68	400/3/50	1943x767x1596	371	3/4" G
STORMY PRO SF10Z 400/50	10	11	NS59	810	1020	0	66	400/3/50	1000x741x955	248	3/4" G
STORMY PRO SF10XZ 400/50	10	11	NS59	810	1020	0	66	400/3/50	1000x741x955	254	3/4" G
STORMY PRO S500F10Z 400/50	10	11	NS59	810	1020	500	66	400/3/50	1943x741x1593	399	3/4" G
STORMY PRO S500F10XZ 400/50	10	11	NS59	810	1020	500	66	400/3/50	1943x741x1593	411	3/4" G
STORMY PRO S500F10ZD 400/50	10	11	NS59	810	1020	500	66	400/3/50	1943x767x1596	415	3/4" G
STORMY PRO S500F10XZD 400/50	10	11	NS59	810	1020	500	66	400/3/50	1943x1593x738	513	3/4" G


YD = star-delta start T = integrated refrigerant dryer



Contact your local representative:

www.mark-compressors.com

6999200540



CARE

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

TRUST

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

EFFICIENCY

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.